

For visible to near IR low light detections
Extended red multialkali photocathode
51mm(2 Inch) diameter, 12-stage, Head-on type

GENERAL

Parameter		Description/Value	Unit
Spectral Response		300 to 900	nm
Wavelength of Maximum Response		600	nm
Photocathode	Material	Extended red multialkali	—
	Minimum Effective Area	46	mm dia.
Window Material		Borosilicate glass	—
Dynode	Structure	Linear focused	—
	Number of Stages	12	—
Direct Interelectrode Capacitances	Anode to Last Dynode	2	pF
	Anode to All Other Electrodes	2.5	pF
Base		21-pin glass base	—
Suitable Socket		E678-21A(supplied)	—

MAXIMUM RATINGS (Absolute Maximum Values)

Parameter		Value	Unit
Supply Voltage	Between Anode and Cathode	2700	Vdc
	Between Anode and Last Dynode	500	Vdc
Average Anode Current		0.2	mA
Ambient Temperature		-80 to +50	°C

CHARACTERISTICS (at 25°C)

Parameter		Min.	Typ.	Max.	Unit
Cathode Sensitivity	Luminous(2856K)	140	230	—	μA/lm
	Radiant at 600nm	—	50	—	mA/W
	Red/White Ratio (R-68 filter)	—	0.35	—	—
Anode Sensitivity	Luminous(2856K)	15	100	—	A/lm
	Radiant at 600nm	—	2.2 × 10 ⁴	—	A/W
Gain		—	4.3 × 10 ⁵	—	—
Dark Current (after 30min. storage in darkness)		—	30	100	nA
Time Response	Anode Pulse Rise Time	—	2.6	—	ns
	Electron Transit Time	—	48	—	ns

NOTE: Anode characteristics are measured with the voltage distribution ratio shown below.

VOLTAGE DISTRIBUTION RATIO AND SUPPLY VOLTAGE

Electrodes	K	G	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	Dy10	Dy11	Dy12	P
Ratio	4	0	1	1.4	1	1	1	1	1	1	1	1	1	1	1

Supply Voltage : 1500Vdc, K : Cathode, Dy : Dynode, G : Grid, P : Anode

※ Shield is connected to Dy5.

PHOTOMULTIPLIER TUBE R2257

Figure 1: Typical Spectral Response

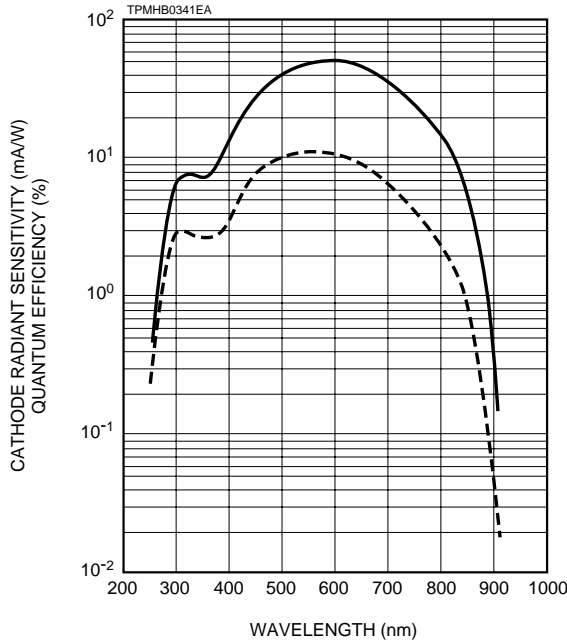


Figure 2: Typical Gain Characteristics


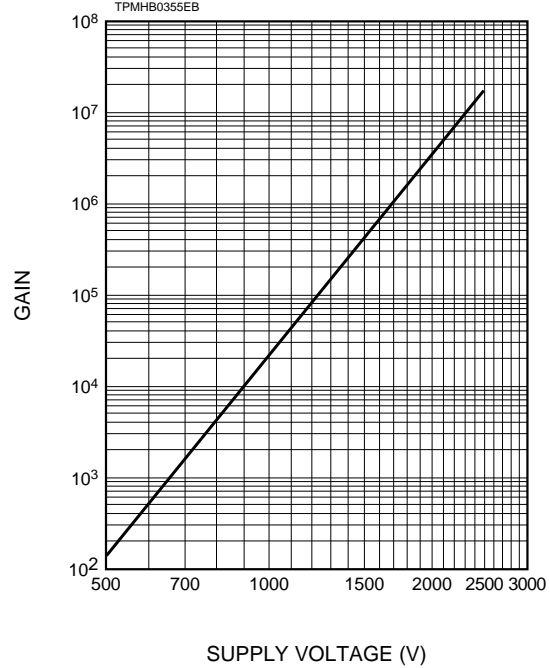


Figure 3: Dimensional Outline and Basing Diagram (Unit : mm)

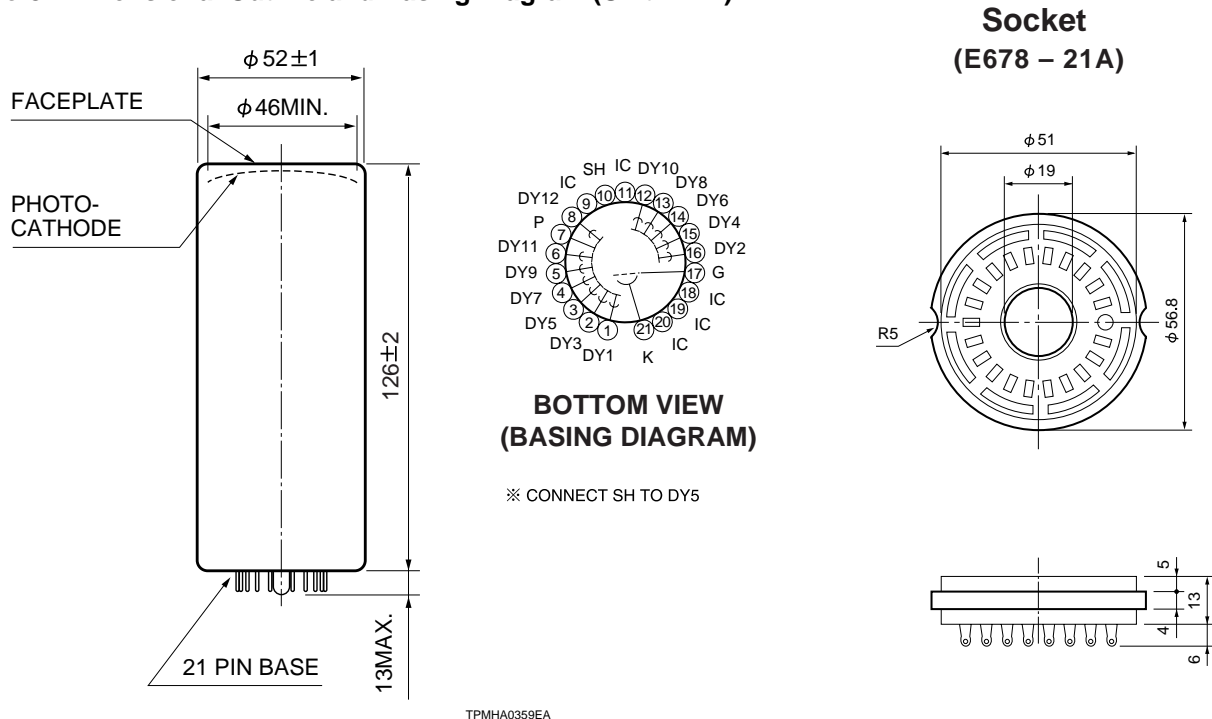

TPMHA0359EA

TACCA0011EA

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Electron Tube Center

314-5, Shimokanzo, Toyooka-village, Iwata-gun, Shizuoka-ken, 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: Lough Point, 2 Gladbeck Way, Windmill Hill, Enfield, Middlesex EN2 7JA, United Kingdom, Telephone: (44)181-367-3560, Fax: (44)181-367-6384

North Europe: Hamamatsu Photonics Norden AB: Färögatan 7, S-164-40 Kista Sweden, Telephone: (46)8-703-29-50, Fax: (46)8-750-58-95

Italy: Hamamatsu Photonics Italia: S.R.L.: Via Della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)2-935 81 733, Fax: (39)2-935 81 741

TPMH1141E02
MAY 1997