


MPPC® (multi-pixel photon counter)

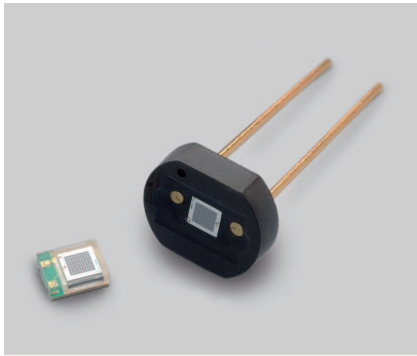

S12571-025, -050, -100C/P

Low afterpulse, for general measurement
Photosensitive area: 1 × 1 mm

The S12571 series are general-purpose MPPC with drastically reduced afterpulses compared to our previously marketed products. By widening the operating voltage range and improving the time resolution and photon detection efficiency, the S12571 series offer the characteristics needed for a variety of applications. These MPPCs have a photosensitive area of 1 × 1 mm and are available in a ceramic package or surface mount type.

Features

- Significantly reduced afterpulses (compared to previous products)
- Superior photon counting capability (superior photon detection efficiency against incident photons)
- Compact
- Operates at room temperature
- Low voltage (100 V or less) operation
- High gain: 10^5 to 10^6
- Superior time resolution
- Immune to the effects of magnetic fields
- Operates with simple readout circuits
- MPPC module also available (sold separately)

Applications

- Fluorescence measurement
- Flow cytometry
- DNA sequencer
- Environmental analysis
- PET
- High energy physics experiment


Related product (sold separately)

- MPPC module **C11205-150**

Low afterpulse

When an MPPC detects photons, the output may contain spurious signals appearing with a time delay from the light input to the MPPC. These signals are called afterpulses. Compared to our previously marketed products, the S12571 series have drastically reduced afterpulses due to use of improved materials and wafer process technologies. Reducing afterpulses brings various benefits such as a better S/N, a wider operating voltage range, and improved time resolution and photon detection efficiency in high voltage regions.

☒ Pulse waveform comparison

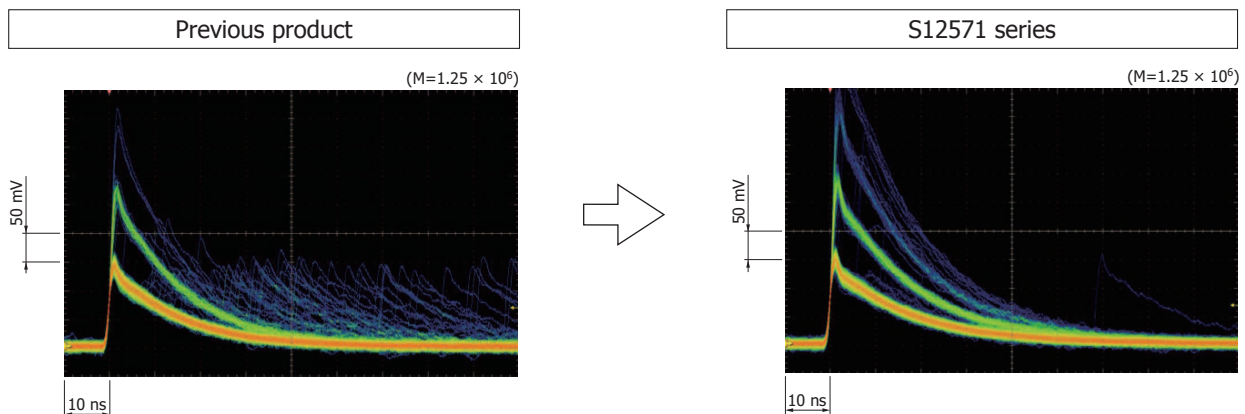

Structure

Parameter	Symbol	S12571						Unit
		-025C	-050C	-100C	-025P	-050P	-100P	
Effective photosensitive area	-	1 × 1			1 × 1			mm
Pixel pitch	-	25	50	100	25	50	100	μm
Number of pixels	-	1600	400	100	1600	400	100	-
Geometrical fill factor	-	65	62	78	65	62	78	%
Package	-	Ceramic			Surface mount type			-
Window	-	Silicone resin			Epoxy resin			-
Window refractive index	-	1.41			1.55			-

Absolute maximum ratings

Parameter	Symbol	S12571						Unit
		-025C	-050C	-100C	-025P	-050P	-100P	
Operating temperature*1	Topr	-20 to +60			-20 to +60			°C
Storage temperature*1	Tstg	-20 to +80			-20 to +80			°C
Reflow soldering conditions*2	Tsol	-			Peak temperature: 240 °C, twice (see P.6)			-
Soldering conditions	-	350 °C max., once, 3 s max.*3			-			-

*1: No condensation

When there is a temperature difference between a product and the surrounding area in high humidity environment, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.

*2: JEDEC level 5a

*3: At least 1 mm away from lead root

Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

Electrical and optical characteristics (Typ. Ta=25 °C, unless otherwise noted)

Parameter	Symbol	S12571						Unit
		-025C	-050C	-100C	-025P	-050P	-100P	
Spectral response range	λ	320 to 900			320 to 900			nm
Peak sensitivity wavelength	λp	450			450			nm
Photon detection efficiency (λ=λp)*4	PDE	35			35			%
Dark count*5	Typ.	100			100			kcps
	Max.	200			200			
Time resolution (FWHM)*6	-	250	250	300	250	250	300	ps
Terminal capacitance	Ct	35			35			pF
Gain	M	5.15×10^5	1.25×10^6	2.8×10^6	5.15×10^5	1.25×10^6	2.8×10^6	-
Gain temperature coefficient	ΔTM	8.2×10^3	2.7×10^4	1.2×10^5	8.2×10^3	2.7×10^4	1.2×10^5	/°C
Breakdown voltage	VBR	65 ± 10			65 ± 10			V
Recommended operating voltage	Vop	VBR + 3.5	VBR + 2.6	VBR + 1.4	VBR + 3.5	VBR + 2.6	VBR + 1.4	V
Temperature coefficient of recommended operating voltage	ΔTVop	60			60			mV/°C

*4: Photon detection efficiency does not include crosstalk or afterpulses.

*5: Threshold=0.5 p.e.


*6: Single photon level

Note: The above characteristics were measured the operating voltage that yields the gain listed in this catalog. (Refer to the data attached to each product.)


The last letter of each type number indicates the package type (C: ceramic, P: surface mount type).

Photon detection efficiency vs. wavelength


S12571-025C/P ($V_{op}=V_{BR} + 3.5$ V)

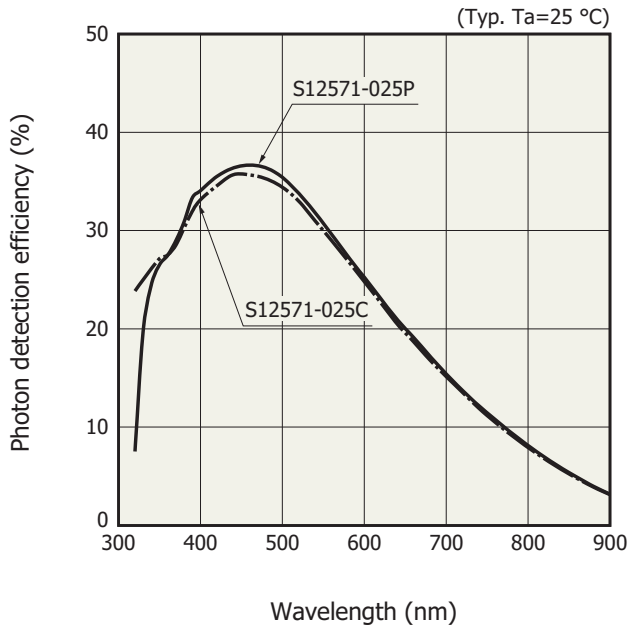

S12571-050C/P ($V_{op}=V_{BR} + 2.6$ V)

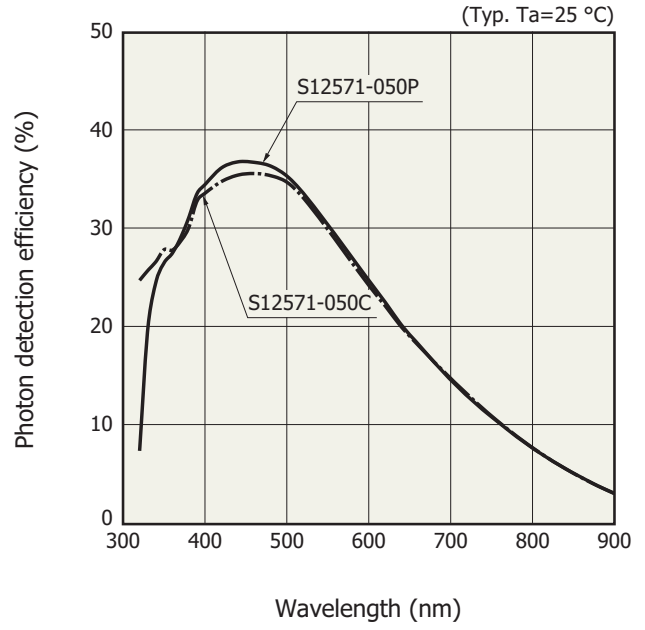


S12571-100C/P ($V_{op}=V_{BR} + 1.4$ V)

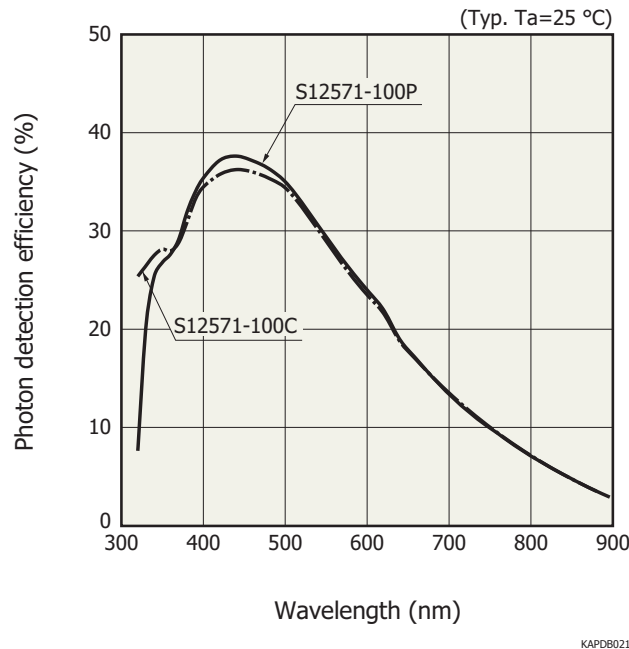


Photon detection efficiency does not include crosstalk or afterpulses.

Gain vs. overvoltage

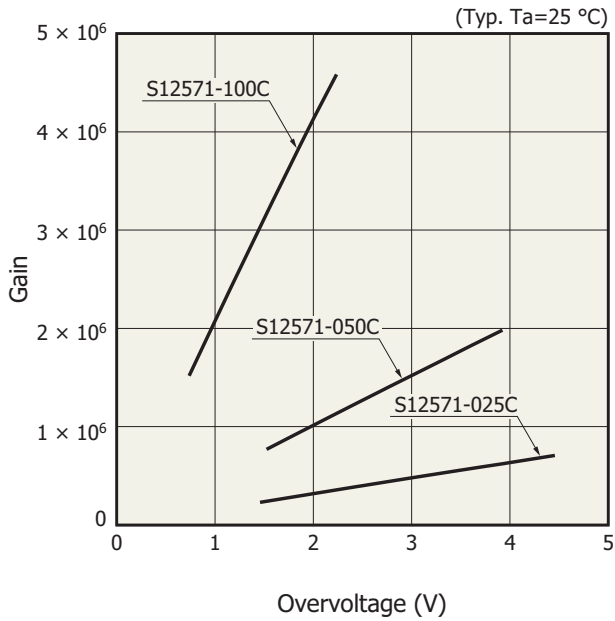


KAPDB0241EA

Photon detection efficiency vs. overvoltage

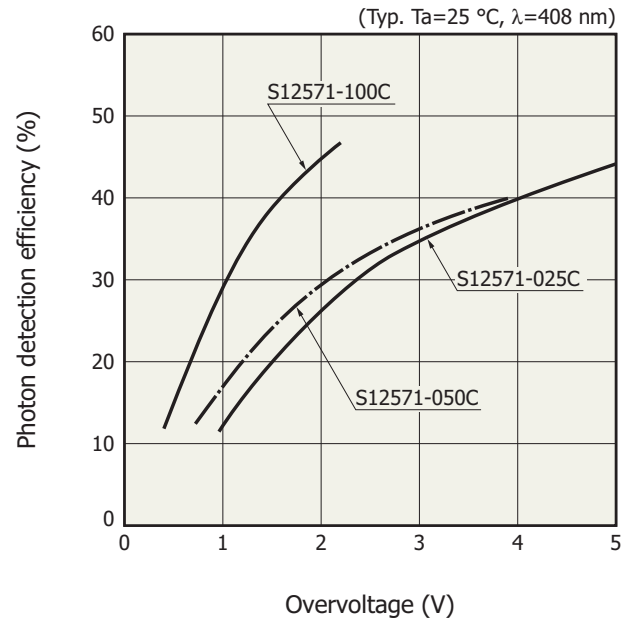

KAPDB0242EB

Crosstalk probability vs. overvoltage


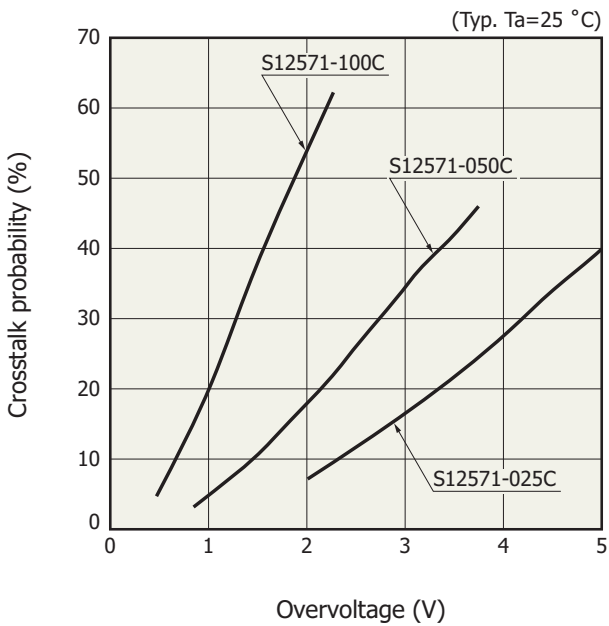


KAPDB0243EB

MPPC characteristics vary with the operating voltage. The 25 μm pixel pitch type is suitable for applications requiring a wide dynamic range, because it has a large number of pixels and provides narrow-width output pulses. The 100 μm pixel pitch type is suitable for applications where high gain is essential. Although increasing the operating voltage improves the photon detection efficiency and time resolution, it also increases the dark count and crosstalk at the same time, so an optimum operating voltage must be selected to match the application.

Dimensional outlines (unit: mm)


S12571-025C/-050C/-100C

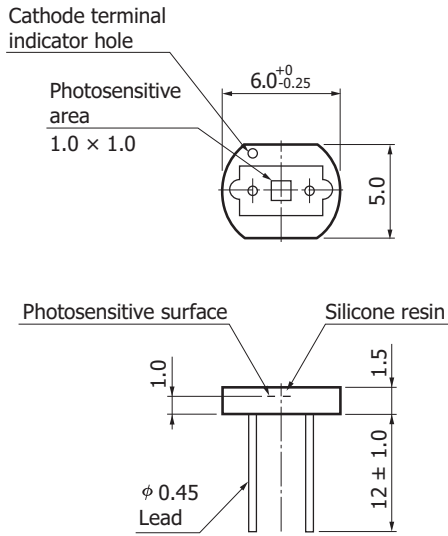

Tolerance unless otherwise noted: ±0.2

KAPDA0141EA


S12571-025P/-050P/-100P

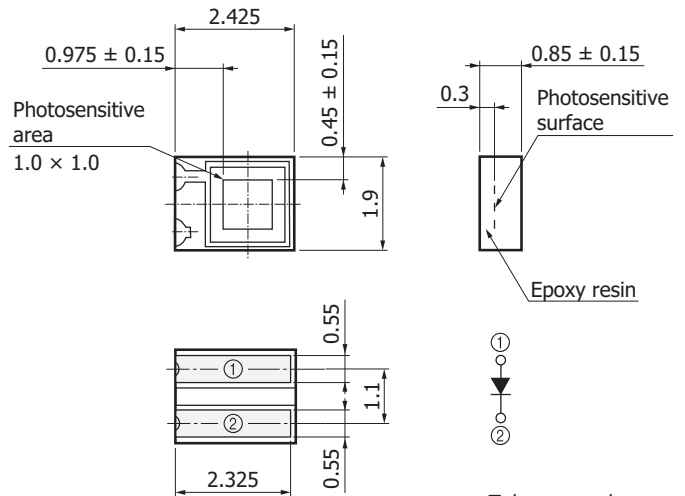


Tolerance unless otherwise noted: ±0.1

KAPDA0142EA

Connection example

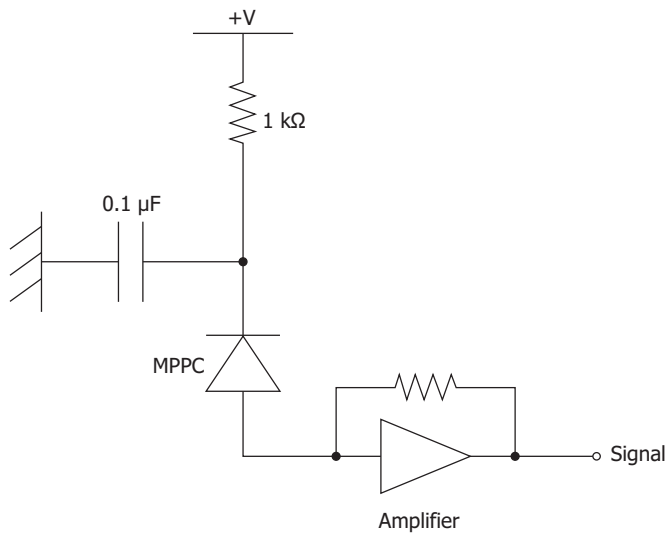

KAPDC0024EB

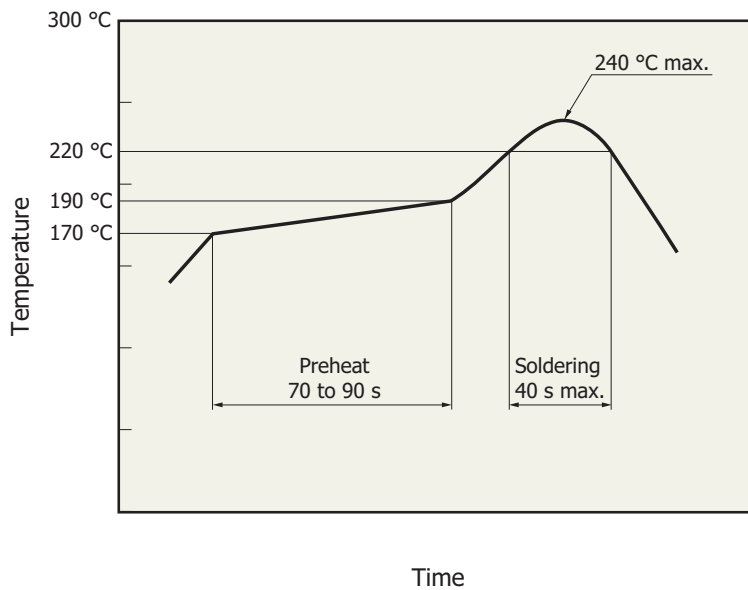Measured example of temperature profile with our hot-air reflow oven for product testing

KPICB0171EA

- This surface mount type product supports lead-free soldering. After unpacking, store it in an environment at a temperature of 25 °C or less and a humidity of 60% or less, and perform soldering within 24 hours.
- This effect that the product receives during reflow soldering varies depending on the circuit board and reflow oven that are used. Before actual reflow soldering, check for any problems by testing out the reflow soldering methods in advance.

Precautions

- The 100 μm pixel pitch type is an Electrostatic sensitive device. See section 4, "Electrostatic sensitive devices" in "Metal, ceramic, plastic package products" Precautions.
- If necessary, incorporate appropriate protective circuits in power supplies, devices, and measuring instruments to prevent overvoltage and overcurrent.

Related information

www.hamamatsu.com/sp/ssd/doc_en.html

■ Precautions

- Disclaimer
- Metal, ceramic, plastic package products
- Surface mount type products

MPPC is a registered trademark of Hamamatsu Photonics K.K.

Information described in this material is current as of December, 2015.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSUwww.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39) 02-93581733, Fax: (39) 02-93581741

China: Hamamatsu Photonics (China) Co., Ltd.: B1201, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86) 10-6586-6006, Fax: (86) 10-6586-2866