

S11519 series

**Enhanced near IR sensitivity, using a MEMS technology**

HAMAMATSU has developed various types of Si detectors that offer enhanced near-infrared sensitivity due to a MEMS structure formed on the back side of the photodiode. The S11519 series are a family of Si APDs with improved sensitivity in the near infrared region.

The S11519 series provides significantly higher sensitivity to YAG laser light (1.06 μm) compared to our conventional product (S8890 series).

The S11519 series is a low bias operation type with enhanced sensitivity in the near infrared region. Compared to the conventional product S8890 series, the S11519 series has improved various characteristics such as breakdown voltage, dark current, and cut-off frequency.

**Features**

- High sensitivity in the near infrared region
- High gain
- Stable operation at low bias

**Applications**

- YAG laser monitor
- Long wavelength light detection

**General ratings / absolute maximum ratings**

Type no.	Window material*1	Package	Active area size*2 (mm)	Absolute maximum ratings	
				Operating temperature Topr (°C)	Storage temperature Tstg (°C)
S11519-10	K	TO-5	φ1.0	-20 to +85	-55 to +125
S11519-30	K	TO-8	φ3.0		


\*1: K=borosilicate glass

\*2: Area in which a typical gain can be obtained


**Electrical and optical characteristics (Typ. Ta=25 °C, unless otherwise noted)**

Type no.	Spectral response range λ (nm)	Peak sensitivity wavelength*3 λp (nm)	Breakdown voltage VBR ID=100 μA		Temp. coefficient of VBR ID=100 μA (V/°C)	Dark current*3 ID		Terminal capacitance*3 Ct (pF)	Cut-off frequency*3 fc RL=50 Ω (MHz)	Excess noise figure*3 x λ=890 nm	Gain M λ=890 nm
			Typ. (V)	Max. (V)		Typ. (nA)	Max. (nA)				
S11519-10	600 to 1150	960	350	500	1.7	3	30	2.0	400	0.3	100
S11519-30						9	90				

\*3: Values measured at a gain listed in the characteristics table

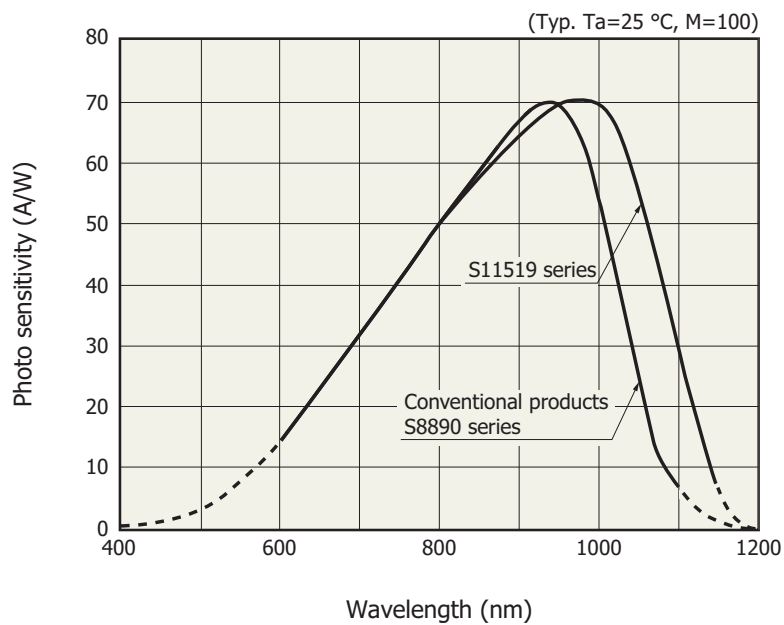
**Spectral response**

KAPD80182EA

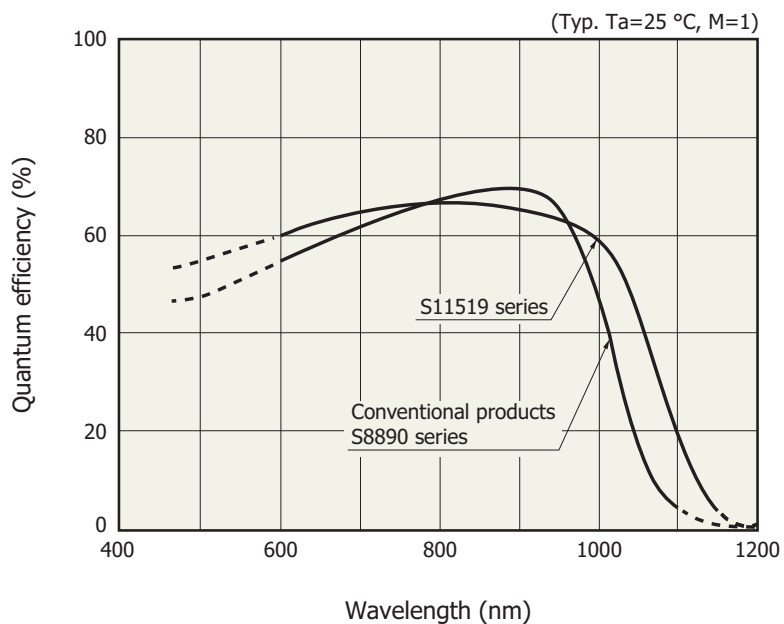
**Spectral response (quantum efficiency)**

KAPD80189EA


### Gain vs. reverse voltage

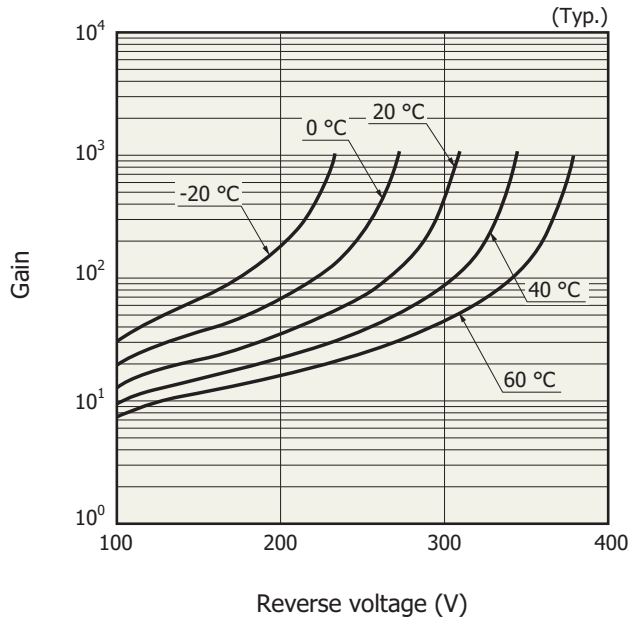

### Dark current vs. reverse voltage



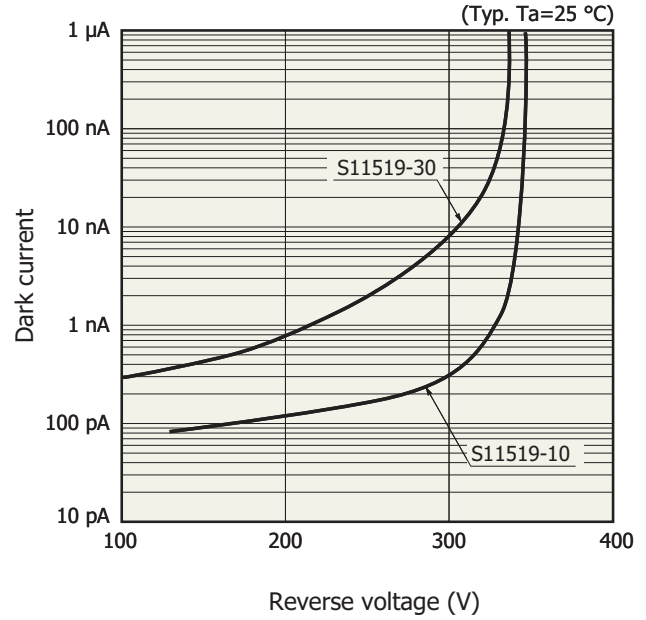


### Terminal capacitance vs. reverse voltage

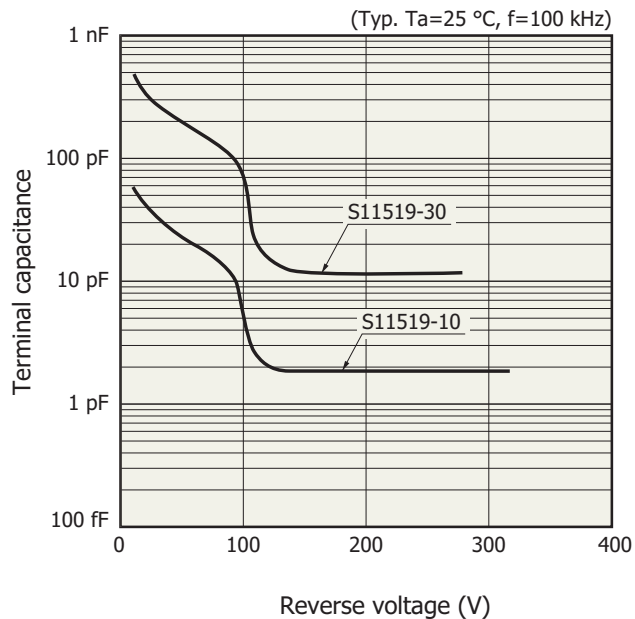

### Dimensional outlines (unit: mm)

S11519-10

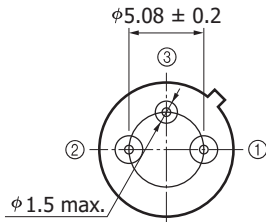
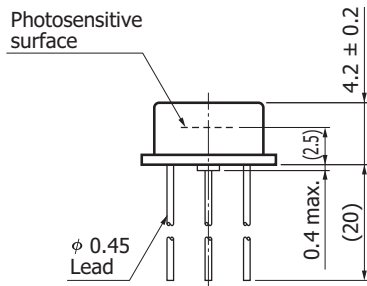
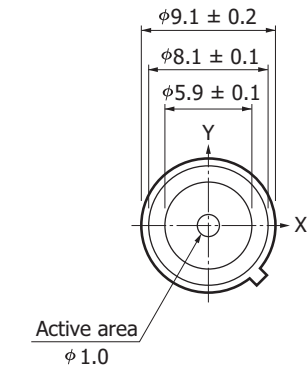


Chip position accuracy with respect to the cap center  
X, Y ≤ ±0.3


The glass window may extend a maximum of 0.2 mm beyond the upper surface of the cap.

KPINA0024EA

S11519-30

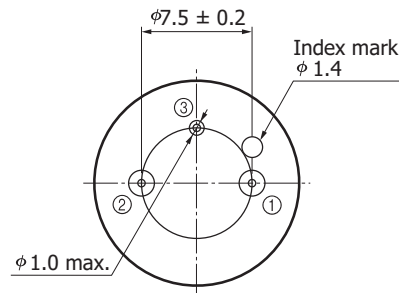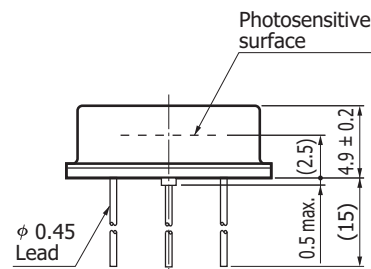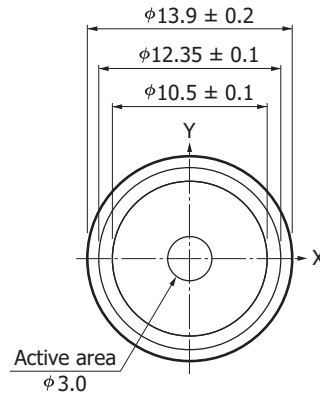

Index mark  
φ 1.4



Chip position accuracy with respect to the cap center  
X, Y ≤ ±0.4

The glass window may extend a maximum of 0.2 mm beyond the upper surface of the cap.

KPINA0025EA

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein.

©2010 Hamamatsu Photonics K.K.

# HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1 int. 6, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741