



# **InGaAs PIN photodiodes**

G11193 series

## Small package, surface mount type

#### Features

Low price

#### Applications

- Small SMD (surface mount device) package
- Low noise, low dark current

- Optical power meter
- Measurement/analytical instruments

Structure

Parameter	G11193-02R	G11193-03R	G11193-10R	Unit
Package		-		
Photosensitive area	ф0.2	ф0.3	φ1.0	mm
Window		-		

#### Absolute maximum ratings

Parameter	Symbol	Condition	G11193-02R	G11193-03R	G11193-10R	Unit
Reverse voltage	V <sub>R</sub> Max.			V		
Operating temperature	Topr	No dew condensation*1		°C		
Storage temperature	Tstg	No dew condensation*1		°C		
Reflow soldering conditions	-		Peak ten	-		

\*1: When there is a temperature difference between a product and the surrounding area in high humidity environment, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.

Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

### Electrical and optical characteristics (Ta=25 °C)


Parameter Sym	Symbol	Condition	G11193-02R			G11193-03R		G11193-10R			Unit	
	Symbol		Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Unit
Spectral response range	λ	Higher than 10% of peak	-	0.9 to 1.7	-	-	0.9 to 1.7	-	-	0.9 to 1.7	-	μm
Peak sensitivity wavelength	λp		-	1.55	-	-	1.55	-	-	1.55	-	μm
Photo sensitivity	S	λ=1.3 μm	0.75	0.85	-	0.75	0.85	-	0.75	0.85	-	A/W
	5	λ=1.55 μm	0.77	1.0	-	0.77	1.0	-	0.77	1.0	-	
Dark current	ID	Vr=5 V	-	40	800	-	100	1200	-	800	4000	pА
Cut-off frequency	fc	VR=5 V, RL=50 Ω, -3 dB	0.6	1	-	0.2	0.5	-	0.025	0.06	-	GHz
Terminal capacitance	Ct	V <sub>R</sub> =5 V, f=1 MHz	-	3	5	-	5	8	-	55	120	pF
Shunt resistance	Rsh	V <sub>R</sub> =10 mV	0.25	1.4	-	0.2	1	-	0.025	0.125	-	GΩ
Detectivity	D*	$\lambda = \lambda p$	1 × 10 <sup>12</sup>	5 × 10 <sup>12</sup>	-	1 × 10 <sup>12</sup>	5 × 10 <sup>12</sup>	-	1 × 10 <sup>12</sup>	5 × 10 <sup>12</sup>	-	cm•Hz <sup>1/2</sup> /W


The G11193 series may be damaged by electrostatic discharge, etc. Be careful when using the G11193 series.


1




#### Photo sensitivity temperature characteristic

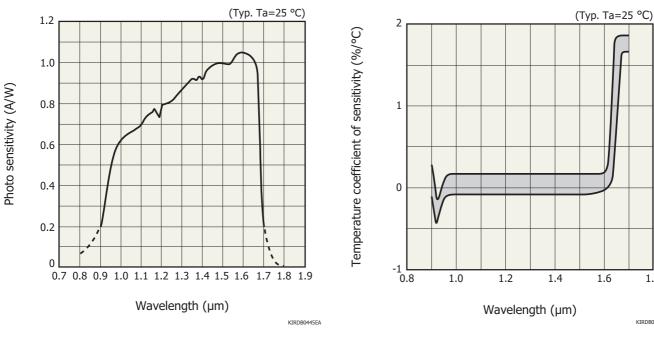



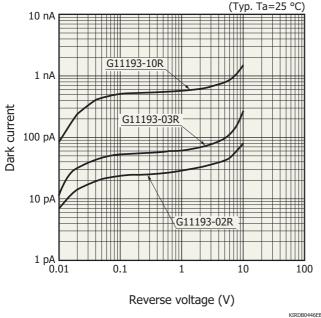

#### Ferminal capacitance vs. reverse voltage

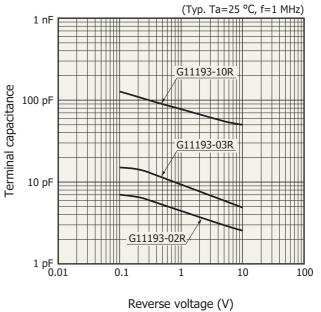


KIRDB0447EB

1.8


KIRDB0042EB



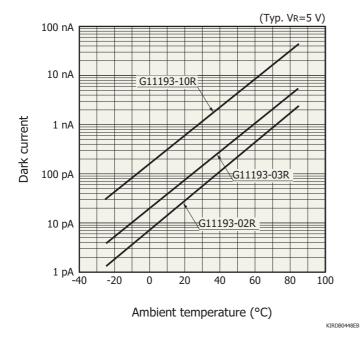

#### Dark current vs. ambient temperature

Recommended solder reflow conditions

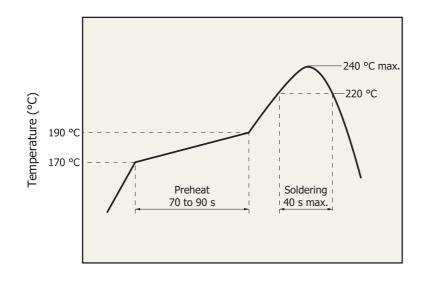


Time

- $\cdot$  After unpacking, store the device in an environment at a temperature range of 5 to 30 °C and a humidity of 60% or less, and perform reflow soldering within 1 year.
- Therminal stress applied to the device during reflow soldering differs depending on the PC board and reflow oven being used.
- When setting the reflow conditions, make sure that the reflow soldering process does not degrade device reliability.

KIRDB0627EA



### Dimensional outline (unit: mm)

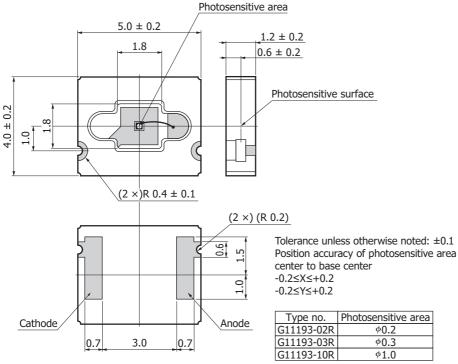

KIRDA0210EC

#### - Related information

www.hamamatsu.com/sp/ssd/doc\_en.html

Precautions

- Disclaimer
- Surface mount type products
- Technical information
- · Infrared detectors

Information described in this material is current as of December 2016.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.



#### www.hamamatsu.com

#### HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

1120-1 ICHINO-CHO, HIgdShirkU, Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-0960, Fax: (49) 8152-375-0, Fax: (49) 8152-265-8 Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerst. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8 France: Hamamatsu Photonics France S.A.R.L: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10 United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777 North Europe: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39) 02-93581733, Fax: (39) 02-93581741 China: Hamamatsu Photonics (China) Co., Ltd.: B1201, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86) 10-6586-6006, Fax: (86) 10-6586-2866