HAMAMATSU
PHOTON IS OUR BUSINESS

16-element Si photodiode arrays

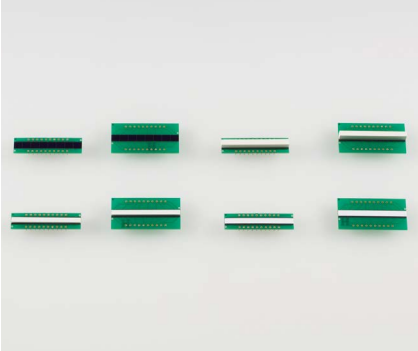

S12362/S12363 series

Back-illuminated photodiode arrays for X-ray non-destructive inspection (element pitch: 2.5 mm)

The S12362/S12363 series is a back-illuminated type 16-element photodiode array specifically designed for non-destructive X-ray inspection. The back-illuminated photodiode array is also simple to handle and easily couples to scintillators without having to worry about wire damage because there are no bonding wires and photosensitive areas on the back side.

Features

- **Spectral response range: 340 to 1100 nm**
- **Element size: 2.2 (W) × 2.7 (H) mm/one element**
- **Element pitch: 2.5 mm (× 16 pixels)**
- **Mounted on two kinds of board size:**
  40.4 (W) × 10.2 (H) mm, 40.4 (W) × 20.0 (H) mm
- **Long and narrow format by multiple arrays**
- **Supports dual energy imaging**
  (When used in an upper and lower two-layer combination. See page 7.)

Applications

- **X-ray non-destructive inspection, etc.**

Selection guide

Type no.	Number of elements	Element pitch (mm)	Element size W × H (mm)	Board size W × H (mm)	Scintillator			Application example
					Type	Afterglow*1	Crosstalk*1	
S12362-021*2	16	2.5	2.2 × 2.7	40.4 × 10.2	None	-	-	General photometry
S12363-021*2				40.4 × 20.0				
S12362-121				40.4 × 10.2	CsI(Tl)	Large	Low	X-ray non-destructive inspection of slow-moving objects (baggage inspection, etc.)
S12363-121				40.4 × 20.0				
S12362-321				40.4 × 10.2	GOS ceramic	Small	Low	X-ray non-destructive inspection of fast-moving objects (baggage inspection, etc.)
S12363-321				40.4 × 20.0				
S12362-421				40.4 × 10.2	Phosphor sheet	Small	High	X-ray non-destructive inspection (at low X-ray energy)
S12363-421				40.4 × 20.0				

*1: Relative characteristics when three types of scintillators are compared
*2: This photodiode array as it is does not function as an X-ray detector. An appropriate scintillator or phosphor sheet should be added at user's side.
Note: The S12362/S12363 series are also compatible with other scintillators than those listed in the above table (custom made devices). Please consult our sales office.

Precautions

CsI(TI) scintillator of the S12362/S12363-121 has deliquescence. Avoid storing or using the S12362/S12363-121 at high humidity.

Feature 01 Back-illuminated type

The S12362/S12363 series photodiode arrays have a back-illuminated type structure. This structure uses no fragile easily-broken bonding wires since the photodiode array output terminals are directly connected by bump bonding to the electrodes on the board. This structure is robust since the board wiring is laid out within the board. The photodiode surface for coupling the scintillator has no bonding wires or photosensitive areas, so there is less risk of damaging the photodiode array. The S12362/S12363 series is also resistant to effects from temperature cycle and so ensures high reliability.

Cross-section diagram (comparison between front-illuminated type and back-illuminated type)

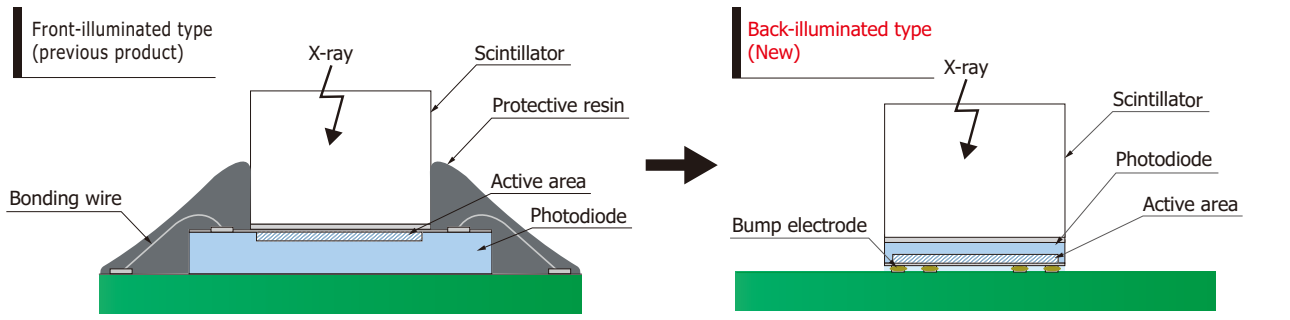

Feature 02 Multiple applications

The S12362/S12363 series supports dual energy imaging. To simultaneously detect high energy X-rays and low energy X-rays, the S12362/S12363 series is designed so that two photodiode arrays, each with a different scintillator, are combined in an upper and lower two-layer format. Arranging two or more S12362/S12363 series photodiode arrays in a row in close proximity also forms a line sensor that allows measurement of long objects.

Sensor structure examples



Two-layer combination
(S11212/S11299 series)



Multi-array format
(S11212 series)

Absolute maximum ratings

Parameter	Symbol	-021	-121, -321, -421	Unit
Reverse voltage	VR max	10		V
Operating temperature*3	Topr	-20 to +60	-10 to +60	°C
Storage temperature*3	Tstg	-20 to +80	-20 to +70	°C

*3: No dew condensation
When there is a temperature difference between a product and the surrounding area in high humidity environment, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.

Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

Electrical and optical characteristics (Ta=25 °C, per element, S12362-021 characteristics except X-ray sensitivity)

Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit
Spectral response range	λ			-	340 to 1100	-	nm
Peak sensitivity wavelength	λp			-	920	-	nm
Photosensitivity	S	λ=540 nm		380	420	460	mA/W
		λ=λp		550	610	670	
Short circuit current	Isc	*4		6	7	-	μA
X-ray sensitivity	IscX	*5	-121	-	12.5	-	nA
			-321	-	7.2	-	
			-421	-	6.0	-	
Dark current	ID	VR=10 mV		-	5	50	pA
Rise time	tr	VR=0 V, RL=1 kΩ 10 to 90%, λ=658 nm		-	6.5	-	μs
Terminal capacitance	Ct	VR=0 V, f=10 kHz		50	75	100	pF

*4: 100 lx, 2856 K

*5: These are reference (X-ray tube voltage 120 kV, tube current 1.0 mA, aluminum filter t=6 mm, 830 mm). X-ray sensitivity depends on the X-ray equipment operating and setup conditions.

Spectral response (characteristics without scintillator)

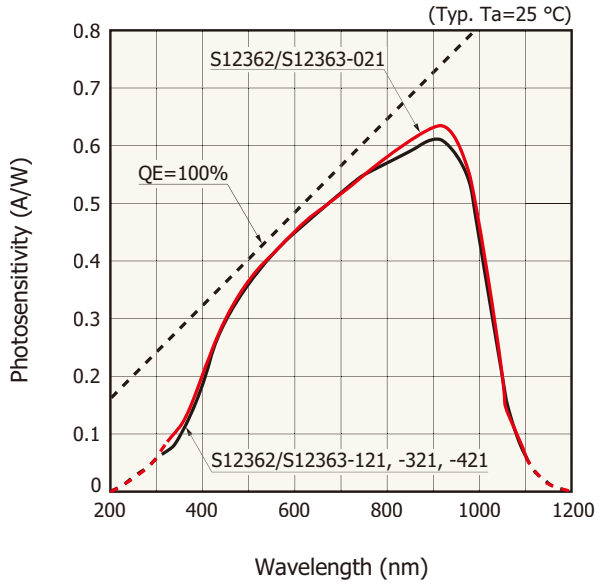

Spectral response characteristics of the S12362/S12363-121, -321, -421 include the transmittance and reflectance of the adhesive resin used to bond a scintillator.

KMPDB0463EB

Emission spectrum of scintillator and spectral response

S12362/S12363-121

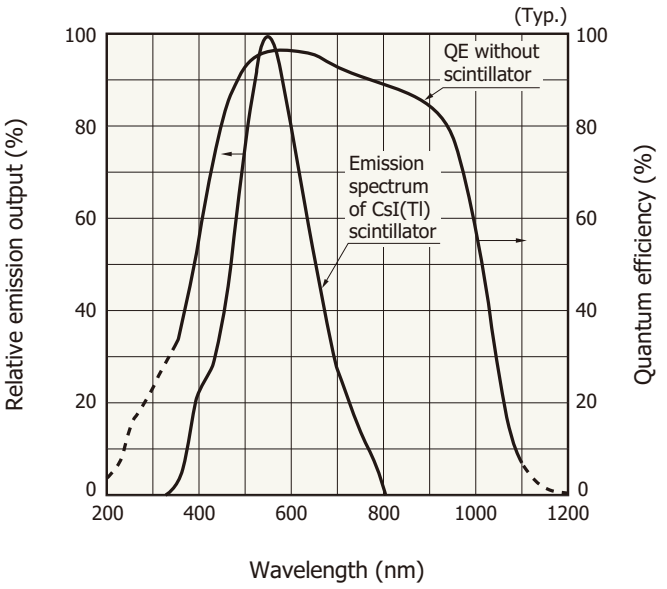

KSPDB0282EE

S12362/S12363-321

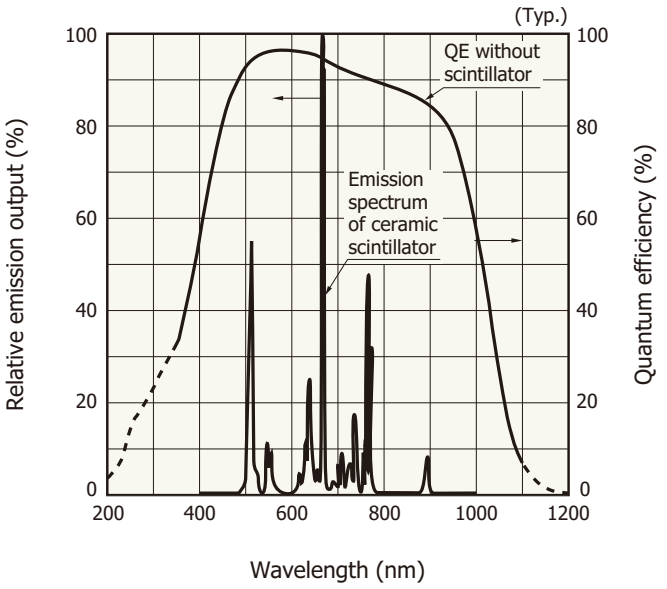

KSPDB0281EE

Scintillator specifications

Parameter	Condition	CsI(TI)	Ceramic	Unit
Peak emission wavelength		560	512	nm
X-ray absorption coefficient	100 keV	10	7	cm^{-1}
Refractive index	at peak emission wavelength	1.7	2.2	-
Decay constant		1	3	µs
Afterglow	100 ms after X-ray turn off	0.3	0.01	%
Density		4.51	7.34	g/cm^3
Color		Transparent	Light yellow-green	-
Sensitivity non-uniformity		±10	±5	%

Dimensional outlines (unit: mm, tolerance: ±0.1 mm unless otherwise noted)

S12362-021

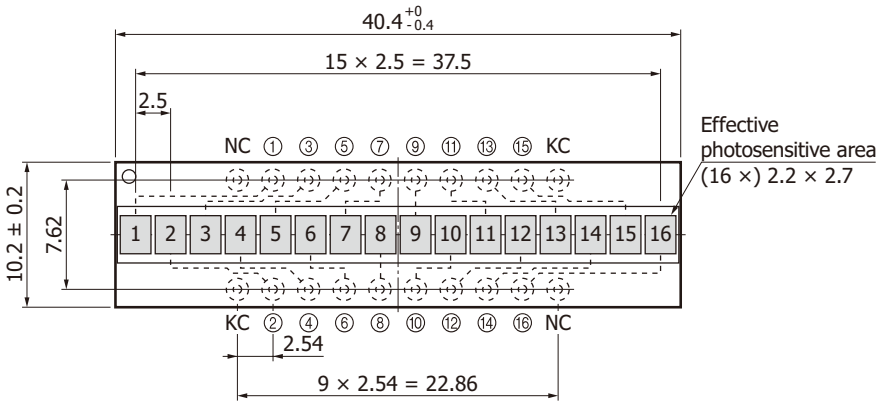

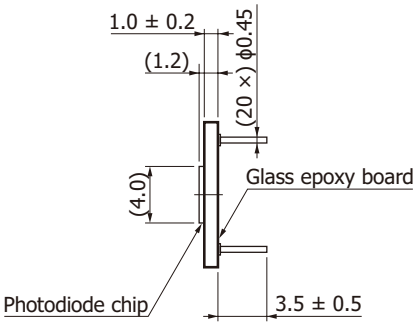

Tolerance unless otherwise noted: ±0.1
Chip center position accuracy
(with respect to package center)
X: ±0.1
Y: ±0.2

KMPDA0332EB

S12363-021

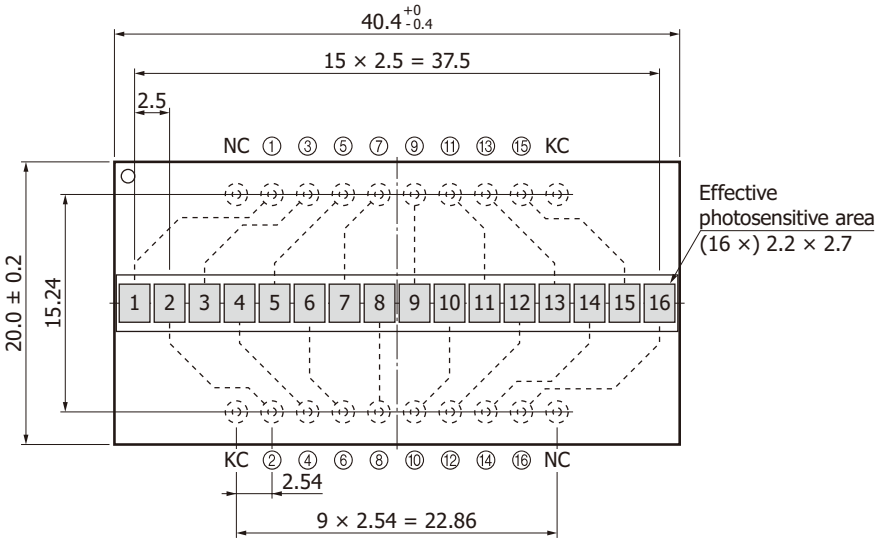

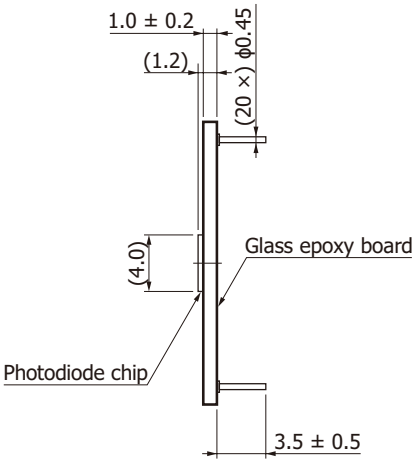

Tolerance unless otherwise noted: ±0.1
Chip center position accuracy
(with respect to package center)
X: ±0.1
Y: ±0.2

KMPDA0333EB

S12362-121

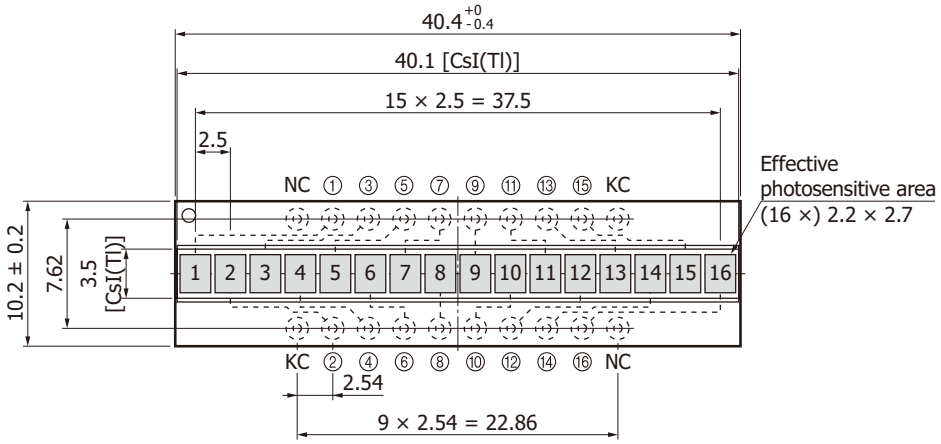

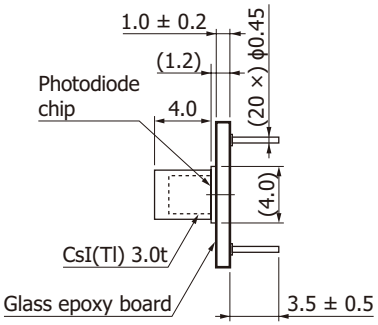

Tolerance unless otherwise noted: ±0.1
Chip center position accuracy
(with respect to package center)
X: ±0.1
Y: ±0.2

KMPDA0334EB

S12363-121

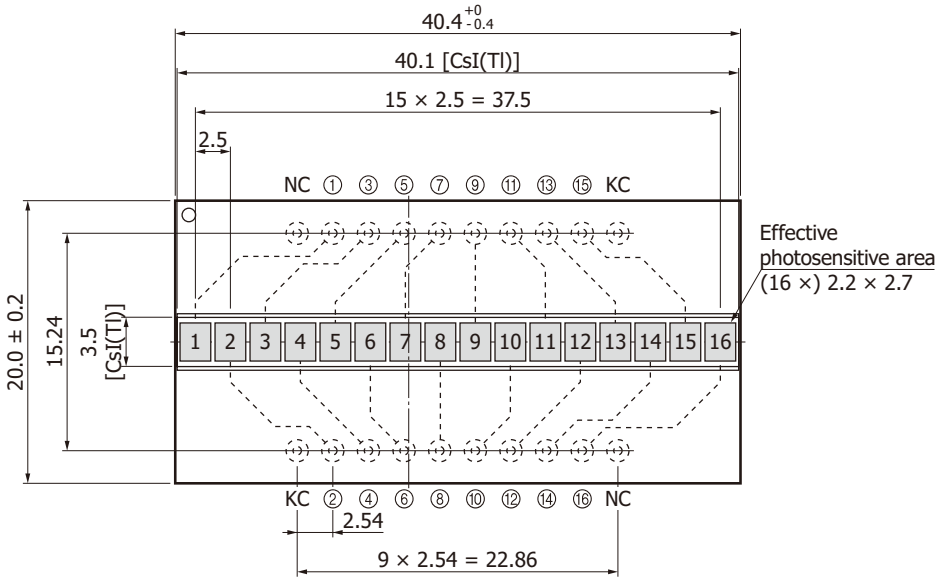

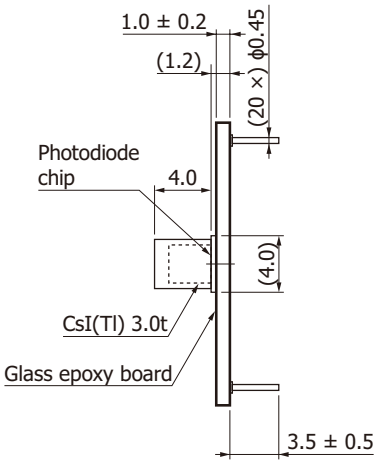

Tolerance unless otherwise noted: ±0.1
Chip center position accuracy
(with respect to package center)
X: ±0.1
Y: ±0.2

KMPDA0335EB

S12362-321

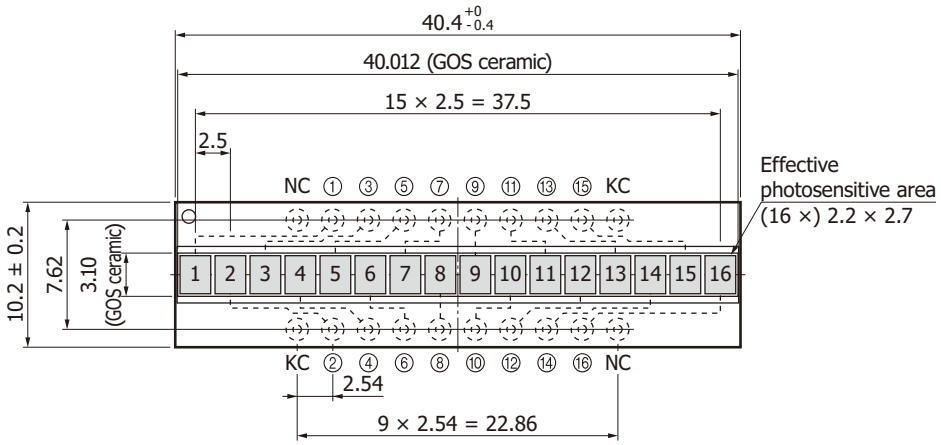

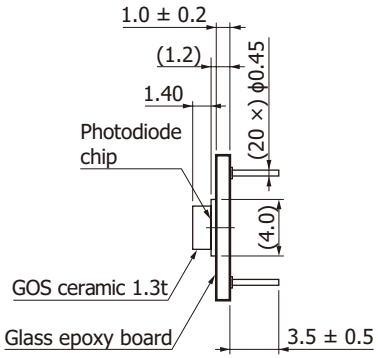

Tolerance unless otherwise noted: ±0.1
Chip center position accuracy
(with respect to package center)
X: ±0.1
Y: ±0.2

KMPDA0336EB

S12363-321

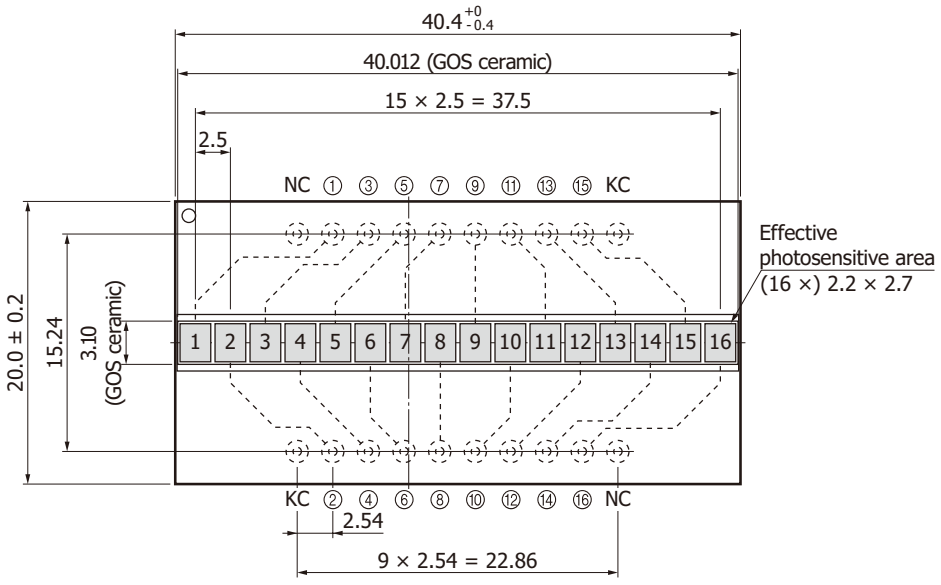

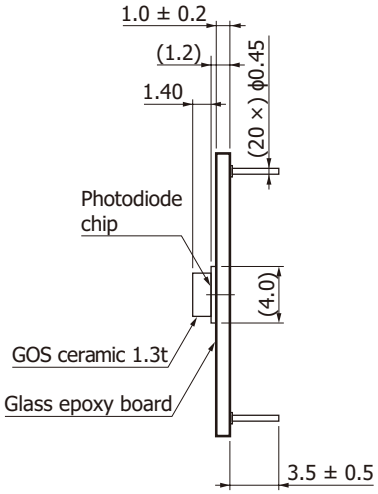

Tolerance unless otherwise noted: ±0.1
Chip center position accuracy
(with respect to package center)
X: ±0.1
Y: ±0.2

KMPDA0337EB

S12362-421

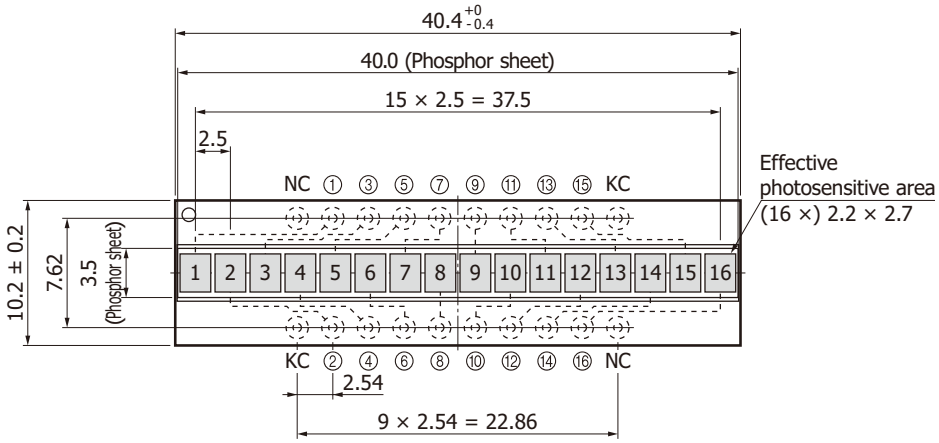

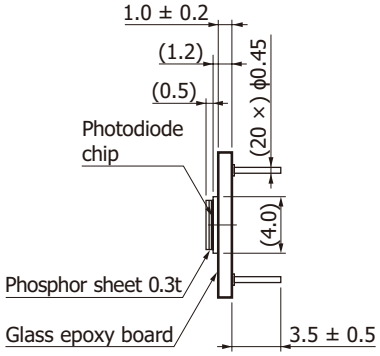

Tolerance unless otherwise noted: ±0.1
Chip center position accuracy
(with respect to package center)
X: ±0.1
Y: ±0.2

KMPDA0338EC

S12363-421

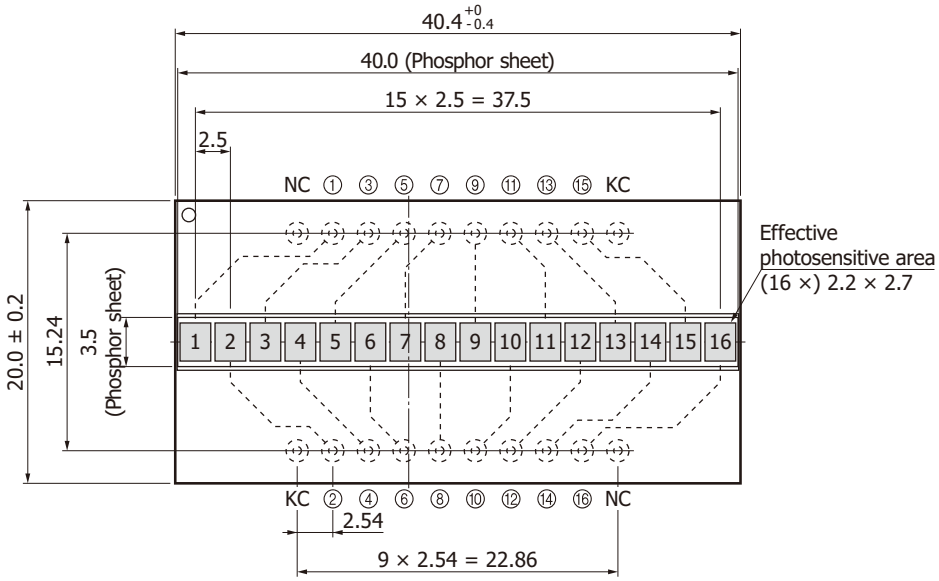

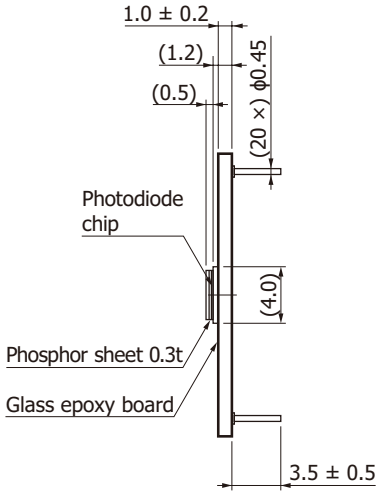

Tolerance unless otherwise noted: ±0.1
Chip center position accuracy
(with respect to package center)
X: ±0.1
Y: ±0.2

KMPDA0339EC

Combination examples (for dual energy imaging)

Dual energy imaging is a technique that acquires and superimposes two types of data in a single scan by using X-rays at two different energy levels (high energy and low energy). Two photodiode arrays with scintillators are used: one at the upper stage and the other at the lower stage. The upper stage is used for low energy detection, and the lower stage for high energy detection. Arranging two or more of these devices in a row also forms a line sensor for dual energy imaging.

①This combination uses the S12363 series in both upper and lower stages.

· [Upper stage] S12363-421 + [Lower stage] S12363-121

· [Upper stage] S12363-421 + [Lower stage] S12363-321

②This combination uses the S12363 series in the upper stage and the S12362 series in the lower stage

· [Upper stage] S12363-421 + [Lower stage] S12362-121

· [Upper stage] S12363-421 + [Lower stage] S12362-321

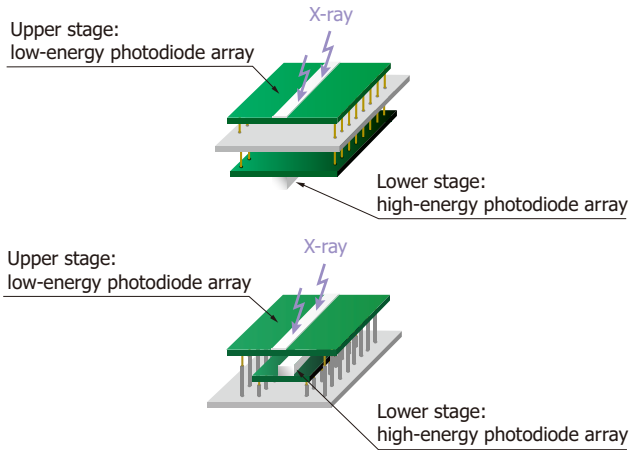

Related information

www.hamamatsu.com/sp/ssd/doc_en.html

■ Precautions
· Disclaimer
· Precautions / Metal, ceramic, plastic package products

■ Catalog
· Technical note / Si photodiodes

Information described in this material is current as of January 2026.
Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.
The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use.
Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU PHOTONICS K.K.
Visit our website for product and contact information.
www.hamamatsu.com
Cat. No. KMPD1171E05
Jan. 2026 DN
Created in Japan